

Weather Proof | Dustproof IP66

Application

For use as an isolating Switch in all. types of circuit as defined in the IEE regulation.

Technical data

Standard of Compliance	IEC60947-3.
Rated Current	20A, 35A, 45A and 63A
Pole Configuration	Double Pole, Triple Pole & Switched Neutral
Rated Voltage	240V/440V A.C.
Rated Frequency	50Hz/60Hz
Utilization Category	AC22B Product also tested to AC23A
IP Rating	IP66

Facilities for pad locking in OFF position. Supplied with Fixed Earth and Isolating Neutral. High impact resistant for mounting enclosure.




Installation & connection


Connection Capacity	Max. 25mm ²
Conduit Entry	Through back cut-outs with 2 X M 2 5 threaded entries.
Mounting Centre	Top centre and bottom centre
Wiring	Ample room for wiring in enclosure
Mounting Screw Hole	Use mounting holes marker provided

Note: Plug all unused conduit entries with threaded Plug Provided.


Technical Diagram

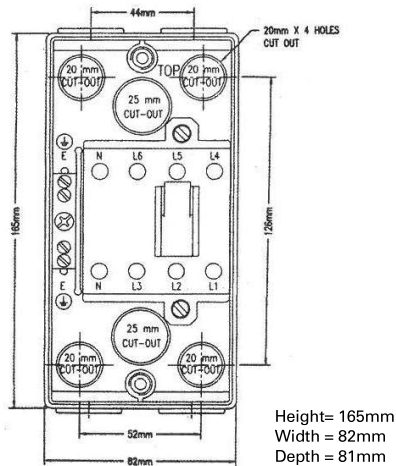

Designation



Triple Pole & Switched Neutral



Current Rating (Amps) List No.

Current Rating (Amps)	List No.
20A	MP202
35A	MP352
45A	MP452
63A	MP632
20A	MP203N
35A	MP353N
45A	MP453N
63A	MP633N